




**Standard Features**

- ◆ 16-Gauge Galvanized Steel
- ◆ Seamless Filled Edges
- ◆ 22 Gauge Vertical Stiffeners on 6-inch Centers Hat Shaped
- ◆ Fiberglass Insulation Filled Cavities 1-5/8" thick 1.5 lb.cu.ft
- ◆ Beveled Strike Edge, Square Hinge Edge
- ◆ 7-Gauge Hinge Reinforcement- Standard / Heavy Duty Design
- ◆ 16-Gauge Top Cap
- ◆ 16-Gauge Inverted Bottom Cap
- ◆ 14-Gauge Lock Reinforcement
- ◆ 12-Gauge Closer Reinforcement
- ◆ Prime Painted Grey Two Part Epoxy Factory Applied, Baked On
- ◆ Standard Lock Preparations Include 161, Fed 86 Edge, Panic Bar Reinforced
- ◆ Approved for Double Egress Use
- ◆ WHI / ITS up to 3 hour, Positive Pressure and "S" Smoke included
- ◆ Meets or Exceeds Standards for ANSI 240.4 and ANSI 250.8

**Sections**

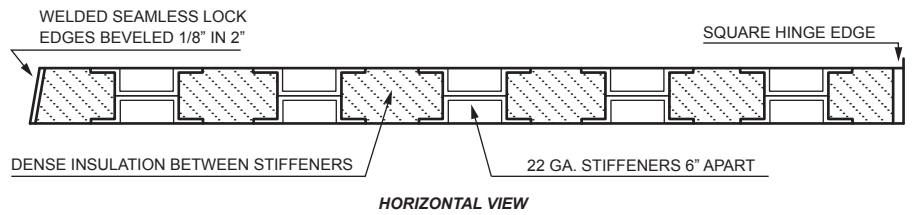

**Typical Hardware Preparations**

